

SENTIMENT ANALYSIS OF DIGITAL WALLET SERVICE USERS USING NAÏVE BAYES CLASSIFIER AND PARTICLE SWARM OPTIMIZATION

Alvie Delia Cahyani¹, Tati Mardiana², Laela Kurniawati³

Information System^{1,3}; Information Technology²
STMIK Nusa Mandiri^{1,3}; Universitas Bina Sarana Informatika²
<http://www.nusamandiri.ac.id>^{1,3}, <http://www.bsi.ac.id>²
E-mail : adeayu.aar@gmail.com¹, tati.ttm@bsi.ac.id², laela@nusamandiri.ac.id³
(*) Corresponding Author

Abstract— Digital wallet services adequately provide many benefits to their users. However, not all users of digital wallet services have a favourable opinion of the service. Therefore, online transportation service companies need to carry out an analysis to determine general sentiment towards their products. The Naïve Bayes Classifier method represents a simple, fast method with excellent accuracy and performs comparatively well for classifying data. However, the Naïve Bayes Classifier method assumes that the attributes are independent, so it can cause the accuracy to be less than optimal. This study aims to improve the accuracy of the Naïve Bayes classification for classifying public opinion on digital wallet services using Particle Swarm Optimization. This study manages data from Twitter as much as 490 tweet data. The test results with the confusion matrix and ROC curves show an increase in the accuracy of the Naïve Bayes Classifier method for the Dana digital wallet from 60.00% to 91.67% and the iSaku digital wallet from 53.23% to 85.00%. The T-test and ANOVA test results show that the test results of both classification methods provide significant differences in the accuracy value.

Keywords: Digital Wallet; Twitter; Sentiment Analysis; Naïve Bayes Classifier; Particle Swarm Optimization.

Abstrak— Layanan dompet digital memberikan banyak kemudahan dan keuntungan kepada para penggunanya. Namun, tidak semua pengguna layanan dompet digital memiliki opini yang positif terhadap layanan tersebut. Oleh karena itu, perusahaan layanan transportasi online perlu melakukan analisis untuk mengetahui sentimen masyarakat terhadap produknya. Metode Naïve Bayes Classifier merupakan metode yang sederhana, cepat, berakurasi tinggi, dan mempunyai performa yang cukup baik untuk melakukan klasifikasi data. Namun, metode Naïve Bayes Classifier mengasumsikan atributnya independen sehingga dapat menyebabkan akurasinya kurang optimal. Tujuan penelitian ini adalah mengoptimalkan metode Naïve Bayes classifier menggunakan Particle Swarm Optimization dalam klasifikasi polaritas percakapan layanan dompet digital. Penelitian ini menggunakan data yang dari Twitter sebanyak 490 data tweet. Hasil pengujian dengan confusion matrix dan kurva ROC menunjukkan peningkatan akurasi metode Naïve Bayes Classifier dompet digital Dana dari 60.00% menjadi 91.67% dan dompet digital iSaku dari 53.23% menjadi 85.00%. Hasil uji T-Test dan Anova menunjukkan hasil pengujian pada kedua metode klasifikasi memiliki perbedaan nyata dalam nilai accuracy.

Kata Kunci: Dompet Digital; Twitter; Analisis Sentimen; Naïve Bayes Classifier; Particle Swarm Optimization.

INTRODUCTION

In recent years, the popularity of digital wallet services in Indonesia has experienced significant growth. Digital wallets represent electronic money that introduces people to easy, safe, and profitable cashless or non-cash payment methods (Aaputra, Didi Rosiyadi, Windu Gata, & Syepry Maulana Husain, 2019). Based on Bank Indonesia data, there was an increase in electronic money transactions, including digital wallets at the end of 2019 soaring 79.3% to 5.2 billion compared

to 2018 2.9 billion transactions. Moreover, the total nominal value of electronic money transactions experienced a drastic increase of 208.5%, reaching 145 trillion rupiahs. This figure has increased to 98 trillion rupiahs, almost three times compared to 2018 47 trillion rupiahs (Budiansyah, 2020). As of April 2020, 49 e-money companies have received official licenses from Bank Indonesia, including banks, technology, and communication companies (Indonesia, 2020).

Not all digital wallet services acquire several active users. This occurs due to a lack of public



trust in the security of these services, and they still consider this something new. Based on the research results of iPrice Group and App Annie, the ten digital wallet applications that had the most significant number of monthly active users in the second quarter of 2019 are GoPay, Ovo, Dana, LinkAja, Jenius, Go Mobile, iSaku, Sakuku, Doku, and Paytren, while the most downloaded digital wallet applications in the second quarter of 2019 are GoPay, Ovo, Dana, LinkAja, iSaku, Jenius, Go Mobile, Paytren, Sakuku, and Doku (Devita, 2019).

Digital wallet services adequately provide many benefits and advantages to their users. However, not all users of digital wallet services obtain a favourable opinion of the service. In this digital era, people can provide ideas about a service, product, politics, and other topics through social media like Twitter (Mahendrajaya, Buntoro, & Setyawan, 2019). The number of daily Twitter users increased in the 3rd quarter of 2019. Daily users on Twitter increased by 17% to 145 million users. One of the countries experiencing the most massive growth in active daily Twitter users is Indonesia (Clinten, 2019). The number of tweets sent to Twitter is up to 500 million daily and 200 billion tweets (Maulana, 2016).

Companies must analyze sentiment to determine what the public thinks about their products or services (Pertiwi, 2019). Sentiment analysis can extract public opinion on specific topics, politics, products, or services in unstructured texts (Saidah & Mayary, 2020).

The previous research related to analyzing the sentiment of digital wallet service users, namely a study conducted by Mahendrajaya, Buntoro, and Setyawan using the Lexicon and Support Vector Machine methods. The sentiment labelling of GoPay user comments from Twitter is 923 positive comments and 287 negative comments. The Sentiment labelling implements the Lexicon-based procedure. This study implements the SVM method for the classification of comparing two kernels. The linear kernel classification of words from as many as 1109 reviews got an accuracy value of 89.17% of the results. At the same time, the polynomial kernel with a comment classification of 1021 reviews got an accuracy value of 84.38%. The results of this study concluded that the classification of tweet data on Twitter for GoPay user comment reviews using the SVM method and the linear kernel is good (Mahendrajaya et al., 2019).

Based on the description above, the researchers analyzed users' sentiments about Dana and iSaku digital wallet services because not many have researched these digital wallets. We humbly propose implementing Particle Swarm

Optimization to improve the Naïve Bayes classifier method in classifying public opinion on digital wallet services. This study aims to increase the accuracy and AUC values in the sentiment analysis of digital wallet service users by adding PSO attribute weights to the Naïve Bayes Classifier method.

MATERIALS AND METHODS

The stages carried out in this study used the Cross Standard Industry Process for Data Mining or CRISP-DM methodology, as follows (Pratama, Pradnyana, & Arthana, 2020):

1. Business Understanding

Business Understanding is a stage in recognizing a business process in a company or organization through business objectives, assessing conditions and field problems, and their needs. In this case, the business objectives are to find out the opinions given by users of the digital wallet services Dana and iSaku and apply the Naïve Bayes Classifier and PSO methods to analyze the sentiment of digital wallet service users.

2. Data Understanding

Data Understanding is the stage of collecting, understanding, and identifying problems related to data quality. This study manages tweet data in Indonesia from June 19 2020, to June 27 2020. The data collection process is by crawling tweet data from social media Twitter using the Twitter search operator on Rapid Miner 9.1. The keywords used are @danawallet and iSaku. The data was taken from June 19 2020 to June 27 2020. From the crawling results, the data obtained were 490 tweets with 272 tweet keywords @danawallet and 218 tweets with iSaku keyword.

3. Data Preparation

Data preparation is the stage of preparing data for the following data mining process by changing the data from unstructured text documents to structured data. The application of data preparation in analyzing the sentiment of users of the Dana and iSaku has several stages, including (Kurniawan & Susanto, 2019):

a. Transform Case

The process of changing all capital letters into lowercase letters contained in tweet data so they are uniform.

b. Tokenize

The tokenization process is to cut sentences into sections or words based on punctuation such



as commas, periods, and other punctuation as needed.

c. Stopword Removal

This process of stop removal is to eliminate unnecessary words. Omitting the term will not change the information in it.

d. Stemming

The stemming process removes the affixes in words so that all words return to their root words.

4. Modeling

Modeling is processing data from preparation results to obtain the required information. This processing process uses the Naïve Bayes Classifier method to predict the probability of class membership and the addition of attribute weighting (attribute weighting) using PSO to increase accuracy in the classification of the Naïve Bayes Classifier. Testing the proposed classification model uses the RapidMiner 9.1 application. We tested the classification model that was formed to measure the level of Accuracy and AUC with randomly separated data with k-fold cross-validation with $k = 10$. Measurement of Accuracy using confusion matrix and AUC values using the ROC curve.

5. Evaluation

Evaluation is to validate the former model. This evaluation uses a confusion matrix and ROC curve. It tests the significant difference between the weighting before and after weighting the attributes with PSO on the Naïve Bayes Classifier using the T-Test and ANOVA methods.

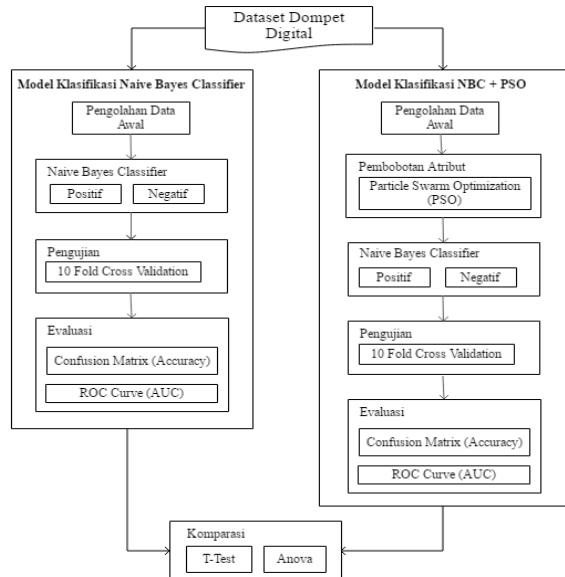


Figure 1. Proposed Model

RESULTS AND DISCUSSION

This chapter will explain the results and discussion of the research on the sentiment analysis of digital wallet service users.

1. Business Understanding

In this study, the business objectives carried out were to determine the opinions given by users of Dana and iSaku digital wallet services, apply the Naïve Bayes Classifier and PSO methods to analyze the sentiment of digital wallet service users and find out the increase in the value of Accuracy and AUC value in sentiment analysis users of digital wallet services with additional weight attributes use PSO to the Naïve Bayes Classifier method.

2. Data Understanding

Data understanding The data collection stage in this study is to retrieve tweet data with the crawling method from Twitter social media using the Twitter search operator on Rapid Miner 9.1 and enter the data as Microsoft Excel to facilitate data processing. The data taken is only tweets in Indonesian. The keywords used are @danawallet and iSaku. The data was taken from June 19, 2020, to June 27, 2020. From the crawling results, the data obtained were 490 tweets with 272 tweet keywords @danawallet and 218 tweets with iSaku keyword. The design of the tweet data crawling model is presented in Figure 2.

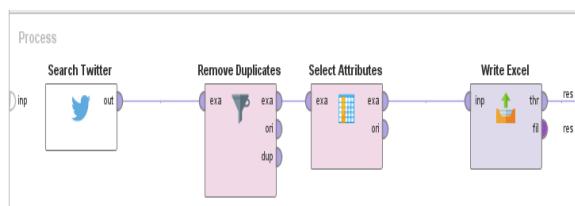


Figure 2. Tweet Data Crawling Model Design

The flow of the data collection process in Figure 2 is to search for tweet data on Twitter based on the entered keyword. Using this keyword as a sentiment analysis dataset removes duplicates from the dataset based on the specified attributes. The attribute in this research is text. Duplicate text represents the selected attribute that has the same value in it. Select the attributes you want to display, delete other details, and convert the obtained dataset into a Microsoft Excel file.

3. Data Preparation (Initial Data Processing)

The data from the crawling that has been previously obtained is still raw data, where the data still contains a lot of noise and is unstructured. Therefore, a preprocessing stage is needed to

remove noise in words and data to make it more structured to facilitate research. Preprocessing in this study uses the Gataframework, which can be accessed at <http://www.gataframework.com/textmining>. Gataframework is an alternative in the preprocessing text to process words in Indonesian because, in the

RapidMiner application, the dictionary to change Indonesian acronyms and stopwords is still not available (Hermanto, Mustopa, & Kuntoro, 2020). Data from preprocessing results using Gataframework will be used as a dataset for testing models in the RapidMiner application.



Figure 3. Display of Gataframework Text Mining Tools

4. Modeling

After carrying out the preprocessing stage, the next step is the classification process modeling process to determine a sentence as a member of the positive class or negative class based on the probability calculation value of the Naïve Bayes Classifier formula. If the probability value in a sentence having a positive class is greater than the negative class, then the sentence is included in the positive class. If the probability of the sentence having a positive class is smaller than the negative class, then the sentence is included in the negative category. The overall results of the classification data can be seen in Table 1.

Table 1. Amount of Data Class Positive and Negative Digital Wallets

No	Digital Wallets	Positive	Negative
1.	Dana	152	120
2.	iSaku	104	114

5. Evaluation

Evaluation is done to validate the former model. Evaluation is done by using the confusion matrix and ROC curve and testing the significant difference between before and after weighting the attributes with PSO in the Naïve Bayes Classifier

using the T-Test and ANOVA methods. The results of the T-Test and ANOVA tests obtained a significant and more accurate model.

a. Testing the Fund Sentiment Model using the Naïve Bayes Classifier

The first experiment was to test the classification model using the Naive Bayes Classifier method. The test design of the Fund sentiment classification model using the Naive Bayes Classifier method is presented in Figure 4.

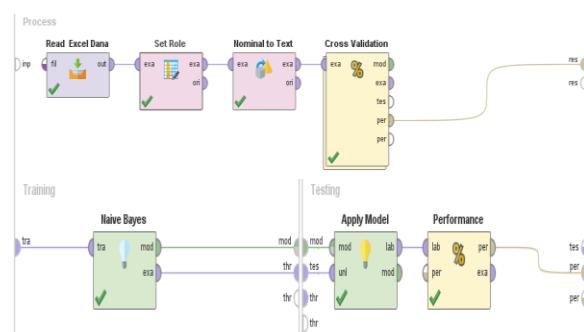


Figure 4. Design of Sentiment Classification Model Funds using the Naïve Bayes Classifier

In Table 2, it is explained that the results of testing the 10 fold cross-validation model of Dana's sentiment were obtained as many as 272 data

consisting of 152 positive data and 120 negative data. A total of 88 data were predicted to be class positive according to the positive class prediction and 64 data predicted class positive turned out to be in the negative class, 75 data were predicted to be class negative accordingly, namely included in the negative class prediction and as many as 45 data predicted to be class negative turns into a positive class. The results obtained by using the Naïve Bayes Classifier algorithm using Rapid Miner 9.1 get the Accuracy value = 60.00% and AUC = 0.599.

Table 2. Results of the Confusion Matrix Fund Sentiment using the Naïve Bayes Classifier

	True Positive	True Negative	Class Precision
Pred. Positive	88	45	66.17%
Pred. Negative	64	75	53.96%
Class Recall	57.89%	62.50%	



Figure 5. ROC Fund Sentiment Curve using the Naïve Bayes Classifier

b. Sentiment Model Testing iSaku uses the Naïve Bayes Classifier

The first experiment was to test the classification model using the Naive Bayes Classifier method. The test design of the sentiment classification model iSaku using the Naive Bayes Classifier method is presented in Figure 6.

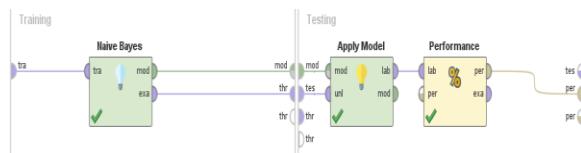



Figure 6. Design of Sentiment Classification Model iSaku uses the Naïve Bayes Classifier

In Table 3, it is explained that the test results of the model 10 fold cross-validation sentiment iSaku obtained as many as 218 data consisting of 104 positive data and 114 negative data. A total of 30 data were predicted to be class negative according to the class negative prediction, and 84 data predicted class negative turned out to be in a positive class, 86 data were predicted to be class positive according to the class positive prediction, and 18 data predicted class positive turned out to be in the class positive. negative. The results obtained by using the Naïve Bayes Classifier algorithm using Rapid Miner 9.1 get the Accuracy value = 53.23% and AUC = 0.520.

Table 3. Results of Confusion Matrix Sentiment iSaku uses the Naïve Bayes Classifier

	True Negative	True Positive	Class Precision
Pred. Negative	30	18	62.50%
Pred. Positive	84	86	50.59%
Class Recall	26.32%	82.69%	

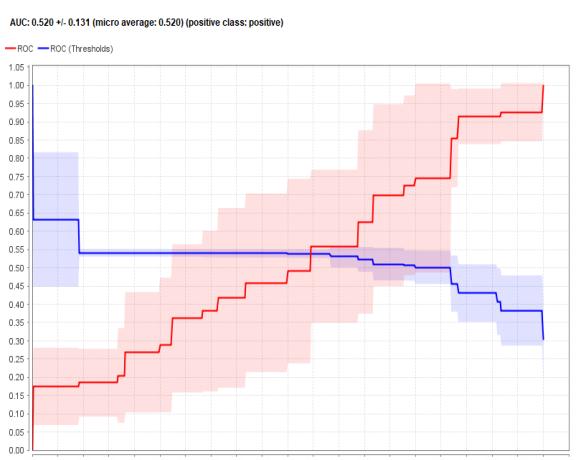


Figure 7. ROC Sentiment Curve iSaku using the Naïve Bayes Classifier

c. Testing the Fund Sentiment Model using the Naive Bayes Classifier and PSO

The second experiment was to test the classification model using the Naive Bayes

Classifier and PSO methods. The test design of the Fund sentiment classification model using the Naive Bayes Classifier and PSO methods is presented in Figure 8.

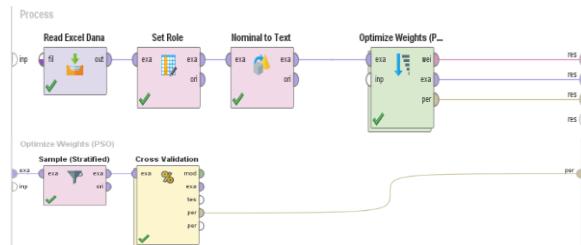


Figure 8. Design of a Fund Sentiment Model using NBC + PSO

Based on the results of trials changing the value of Inertia Weight on the PSO, the highest Accuracy and AUC values are located at Population Size 7, the Maximum Number of Generation value is 100, and the Inertia Weight value 0.2 produces an Accuracy value of 91.67% and an AUC value of 0.750. Table 4 explains that from a sample of 0.1 used in the classification with the Naïve Bayes Classifier and PSO, 14 of the Fund's digital wallet service users were predicted to be class positive, which was included in the positive class prediction and 1 data predicted class positive turned out to be in the negative class, 11 The data predicted in the negative class was by the negative class prediction, and 1 data predicted the negative class turned out to be in a positive class. The results obtained by using the Naïve Bayes Classifier algorithm and PSO using Rapid Miner 9.1 get an Accuracy value = 91.67% and AUC = 0.750.

Table 4. Funds Sentiment Confusion Matrix Results using NBC + PSO

Accuracy: 91.67% +/-17.08 % (micro: 92.59 %)

	True Positive	True Negative	Class Precision
Pred. Positive	14	1	93.33%
Pred. Negative	1	11	91.67%
Class Recall	93.33%	91.67%	

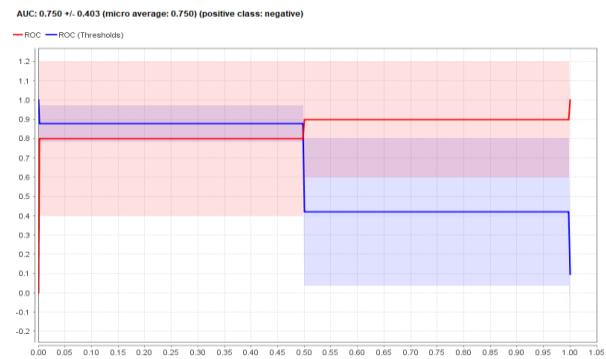


Figure 9. ROC Fund Sentiment Curve using NBC + PSO

d. Sentiment Model Testing iSaku uses the Naïve Bayes Classifier and PSO

The second experiment was to test the classification model using the Naïve Bayes Classifier and PSO methods. The test design of the sentiment classification model iSaku using the Naïve Bayes Classifier and PSO methods is presented in Figure 10.

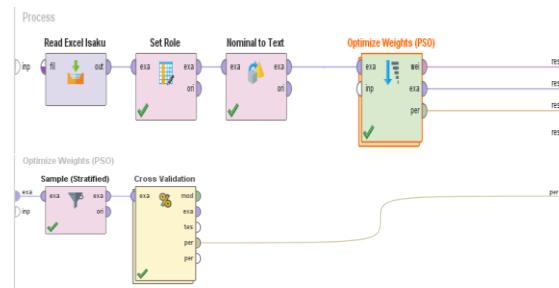


Figure 10. Design of Sentiment Model iSaku uses NBC + PSO

Based on the results of trials changing the Inertia Weight value on the PSO, the highest Accuracy and AUC values are located at Population Size 7, the Maximum Number of Generation value is 100, and the Inertia Weight value 0.1 results in an Accuracy value of 85.00% and an AUC value of 0.800. Table 5 explains from a sample of 0.1 which is used in the classification with the Naïve Bayes Classifier and PSO users of the digital wallet service I. As much as 8 data is predicted to be a negative class according to that is included in the negative class prediction and 3 data predicted the negative class turns into the positive class, 10 The data was predicted to be class positive according to the positive class prediction, and as many as 0 data was predicted to be class positive, it turned out to be in the negative class. The results obtained by using the Naïve Bayes Classifier algorithm and PSO using Rapid Miner 9.1 get an Accuracy value = 85.00% and AUC = 0.800.

Table 5. Results of Confusion Matrix Sentiment iSaku use NBC + PSO

Accuracy : 85.00% +/- 22.91% (micro: 85.71%)			
	True Negative	True Positive	Class Precision
Pred. Negative	8	0	100.00%
Pred. Positive	3	10	76.92%
Class Recall	72.73%	100.00%	

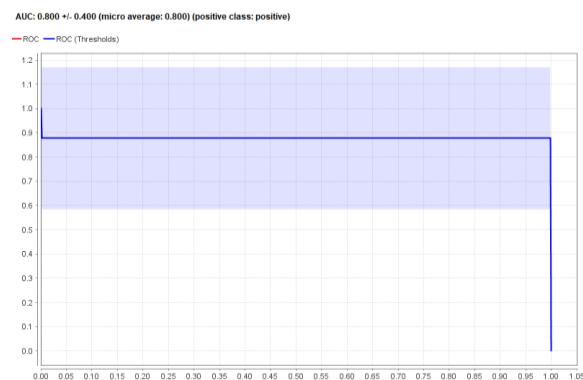


Figure 11. ROC Sentiment Curve iSaku using NBC + PSO

Based on the test results, an evaluation was carried out by comparing each method's Accuracy and AUC values as presented in Table 6. The evaluation results showed that the Accuracy and AUC values of NBC + PSO were higher than single NBC. The use of PSO for attribute weights can increase the accuracy of the Naïve Bayes Classifier algorithm in analyzing the sentiment of digital wallet service users.

Table 6. Comparison of Experimental Results using NBC and NBC + PSO

	Naïve Bayes Classifier		
Accuracy	AUC	Accuracy	AUC
Dana	60.00%	0.599	91.67%
iSaku	53.23%	0.520	85.00%

Researchers carried out further evaluation to test the validity of the classification model performance using the T-Test and Anova test.

e. T-Test and Anova test for Fund sentiment

The T-Test and Anova test designs for Fund sentiment on the RapidMiner 9.1 application are presented in Figure 12.

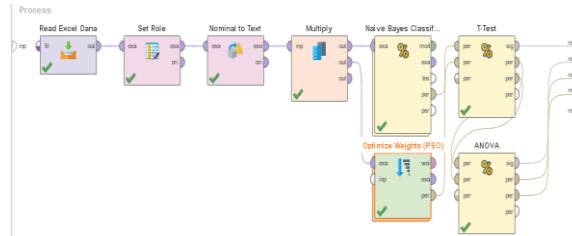


Figure 12. T-Test Model Design and Anova Model Classification of NBC with NBC + PSO Fund Sentiment

The results of the T-Test are presented in Table 7 shows that the NBC + PSO method has a significant difference in value because it has a probability of <0.050, namely 0.000 on the Naïve Bayes Classifier method.

Table 7. T-Test Results of Naïve Bayes Classification Model with NBC + PSO Fund Sentiment

T-Test Significance

A	B	C
0.607 +/- 0.094	0.917 +/- 0.171	
0.607 +/- 0.094		0.000
0.917 +/- 0.171		

The Anova test results are presented in Table 8 showing that dk between groups (comparison) = 1, dk in residuals (denominator) = 18, and alpha = 0.050. Then the F table value is F0.050 (1.18) = 4.41. and F count = 25,245. The value of Fcount>Ftable = 25,245> 4.41, then the two classification methods tested have a significant difference in the Accuracy value.

Table 8. ANOVA Test Results for Naïve Bayes Classification Model with NBC + PSO Fund Sentiment

ANOVA Test

Source	Square Sums	DF	Mean Squares	F	Prob
Between	0.480	1	0.480	25.245	0.000
Residuals	0.342	18	0.019		
Total	0.823	19			

The evaluation results show that NBC + PSO is a fairly good combination of methods in classifying data. The use of PSO for attribute weighting affects increasing the value of accuracy in analyzing the sentiment of users of Dana's digital wallet services.

f. T-Test and Anova test for sentiment iSaku

The T-Test and Anova test design for sentiment iSaku in the RapidMiner 9.1 application are presented in Figure 13.

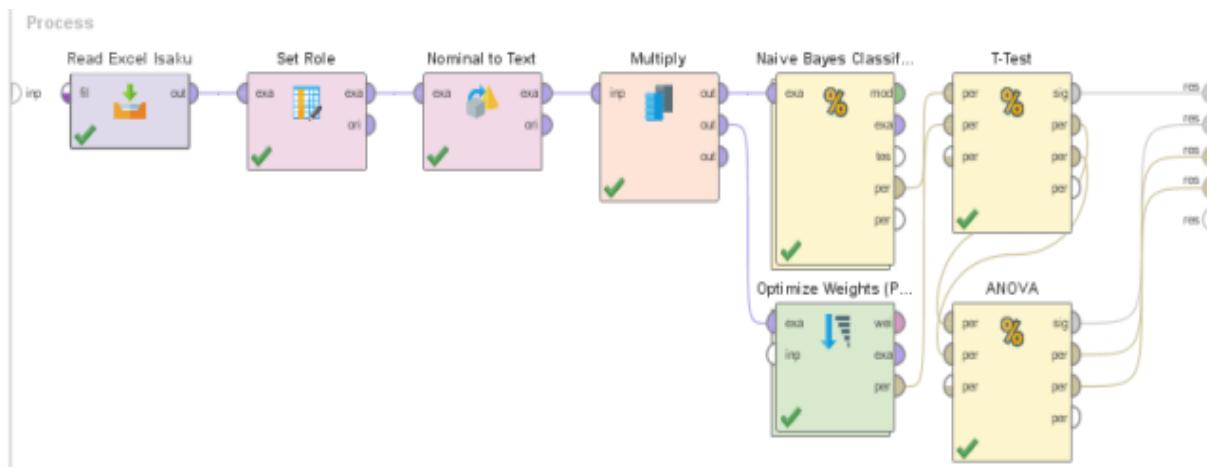


Figure 13. Design of the T-Test and Anova Model Test for Classification of NBC with NBC + PSO Sentiment iSaku

The results of the T-Test are presented in Table 9 shows that the NBC + PSO method has a significant difference in value because it has a probability of <0.050 , namely 0.000 on the Naive Bayes Classifier method.

Table 9. T-Test Results for Naïve Bayes Classification Model with NBC + PSO Sentiment iSaku

T-Test Significance

A	B	C
0.523 +/- 0.053	0.850 +/- 0.229	
0.523 +/- 0.053		0.000
0.850 +/- 0.229		

Anova test results are presented in Table 10 showing that dk between groups (comparison) = 1, dk in residual (denominator) = 18, and alpha = 0.050. Then the F table value is F0.050 (1.18) = 4.41. and F count = 19,377. The value of Fcount>Ftable = 19,377 > 4.41, then the two classification methods tested have a significant difference in the Accuracy value.

Table 10 Anova Test Results for Naïve Bayes Classification Model with NBC + PSO Sentiment iSaku

ANOVA Test

Source	Square Sums	DF	Mean Squares	F	Prob
Between	0.536	1	0.536	19.377	0.000
Residu	0.497	18	0.028		

als

Total	1.033	19
-------	-------	----

The evaluation results show that NBC + PSO is a fairly good combination of methods in classifying data. The use of PSO for attribute weighting affects increasing the value of accuracy in the sentiment analysis of iSaku digital wallet service users.

It can also be ignored that the digital wallet with the best service is Dana because most users give a positive opinion on the digital wallet service.

CONCLUSION

The results of the classification of 490 tweet data using the Naive Bayes Classifier show that the Dana digital wallet has 152 positive sentiments and 120 negative sentiments, as well as the iSaku, has 104 positive sentiments and 114 negative sentiments. Testing tweet data using PSO can increase the Accuracy and AUC values. The increase was significant. The sentiment test using NBC only produced 60.00% and an AUC value of 0.599 after adding the PSO, the Accuracy value was 91.67% and the AUC value was 0.750, while for sentiment testing iSaku using NBC only produced 53.23% and a value AUC 0.520 after adding the PSO Accuracy value to 85.00% and 0.800 AUC value. Weighting the attributes using PSO has a major effect on the Accuracy results obtained, giving an increase of 31.67% for Fund sentiment and 31.77% for Sentiment iSaku. The T-Test and Anova test results show that the two classification methods tested have significant differences in the

Accuracy value. NBC + PSO is a fairly good combination of methods in classifying data. The use of PSO for attribute weighting affects increasing the value of accuracy in analyzing the sentiment of users of the Dana and ISaku digital wallet services.

REFERENCE

Aaputra, S. A., Didi Rosiyadi, Windu Gata, & Syepry Maulana Husain. (2019). Sentiment Analysis Analisis Sentimen E-Wallet Pada Google Play Menggunakan Algoritma Naive Bayes Berbasis Particle Swarm Optimization. *Jurnal RESTI (Rekayasa Sistem Dan Teknologi Informasi)*, 3(3), 377-382. <https://doi.org/10.29207/resti.v3i3.1118>

Budiansyah, A. (2020). GoPay & OVO Cs Kian Populer, Transaksi Tembus Rp 145 T. Retrieved April 23, 2020, from CNBC Indonesia website: <https://www.cnbcindonesia.com/tech/2020/0204112543-37-135041/gopay-ovo-cs-kian-populer-transaksi-tembus-rp-145-t>

Clinten, B. (2019). Pengguna Aktif Harian Twitter Indonesia Diklaim Terbanyak. Retrieved April 24, 2020, from Kompas website: <https://tekno.kompas.com/read/2019/10/30/16062477/pengguna-aktif-harian-twitter-indonesia-diklaim-terbanyak>

Devita, V. D. (2019). Siapa Aplikasi E-wallet dengan Pengguna Terbanyak di Indonesia? Retrieved June 11, 2020, from iPrice Group website: <https://iprice.co.id/trend/insights/e-wallet-terbaik-di-indonesia/>

Hermanto, H., Mustopa, A., & Kuntoro, A. Y. (2020). Algoritma Klasifikasi Naive Bayes Dan Support Vector Machine Dalam Layanan Komplain Mahasiswa. *JITK (Jurnal Ilmu Pengetahuan Dan Teknologi Komputer)*, 5(2), 211-220. <https://doi.org/10.33480/jitk.v5i2.1181>

Indonesia, B. (2020). Informasi Perizinan Penyelenggara dan Pendukung Jasa Sistem Pembayaran. Retrieved April 23, 2020, from Bank Indonesia website: <https://www.bi.go.id/id/sistem-pembayaran/informasi-perizinan/uang-elektronik/penyelenggara-perizin/Contents/Default.aspx>

Kurniawan, I., & Susanto, A. (2019). Implementasi Metode K-Means dan Naïve Bayes Classifier untuk Analisis Sentimen Pemilihan Presiden (Pilpres) 2019. *Eksplora Informatika*, 9(1), 1-10. <https://doi.org/10.30864/eksplora.v9i1.237>

Mahendrajaya, R., Buntoro, G. A., & Setyawan, M. B. (2019). Analisis Sentimen Pengguna Gopay Menggunakan Metode Lexicon Based Dan Support Vector Machine. *Komputek*, 3(2), 52. <https://doi.org/10.24269/jkt.v3i2.270>

Maulana, A. (2016). Twitter Rahasiakan Jumlah Pengguna di Indonesia. Retrieved April 24, 2020, from CNN Indonesia website: <https://www.cnnindonesia.com/teknologi/20160322085045-185-118939/twitter-rahasiakan-jumlah-pengguna-di-indonesia>

Pertiwi, M. W. (2019). Analisis sentimen opini publik mengenai sarana dan transportasi mudik tahun 2019 pada twitter menggunakan algoritma naïve bayes, neural network, KNN dan SVM. *Inti Nusa Mandiri*, 14(1), 27-32.

Pratama, K. A., Pradnyana, G. A., & Arthana, I. K. R. (2020). Pengembangan Sistem Cerdas Untuk Prediksi Daftar Kembali Mahasiswa Baru Dengan Metode Naive Bayes (Studi Kasus: Universitas Pendidikan Ganesha). *Sintech Journal*, 3(1), 22-34.

Saidah, S., & Mayary, J. (2020). Analisis Sentimen Pengguna Twitter Terhadap Dompet Elektronik Dengan Metode Lexicon Based Dan K - Nearest Neighbor. *Jurnal Ilmiah Informatika Komputer*, 25(1).



